



12 MAY 2005

(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
**WO 2004/046561 A1**(51) International Patent Classification<sup>7</sup>: **F15B 13/02,**  
11/16MAMEI, Omer [IT/IT]; Via Tonini, 163, I-41010 Cog-  
nento (IT). MAMEI, Enrico [IT/IT]; Via Magnaghi, 24,  
I-41100 Modena (IT).(21) International Application Number:  
PCT/IB2003/005191(74) Agent: **CRUGNOLA, Pietro**; Luppi Crugnola Bergamini  
& Partners S.r.l., Viale Corassori, 54, I-41100 Modena (IT).(22) International Filing Date:  
17 November 2003 (17.11.2003)(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
MO2002A000332  
15 November 2002 (15.11.2002) IT(71) Applicant (for all designated States except US): **STUDIO  
TECNICO 6 M S.R.L.** [IT/IT]; Via Corletto Nord, 8,  
I-41100 Modena (IT).(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MAMEI, Eronne**  
[IT/IT]; Via Corletto Nord, 8, I-41100 Modena (IT).

[Continued on next page]

(54) Title: FLUID CIRCUIT FOR FEEDING PRIMARY AND AUXILIARY USERS WITH PRESET PRIORITIES

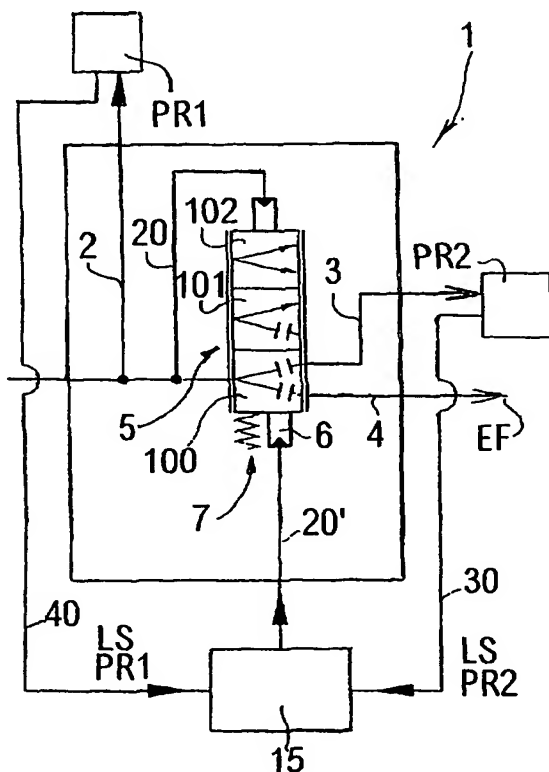

(57) Abstract: Fluid-dynamic circuit (1) for supplying primary and auxiliary uses with preset priorities comprises a pressurised fluid source, conventionally indicated by (P), at least one first use with primary priority, conventionally indicated by (PR1), at least one second use with secondary priority, conventionally indicated by (PR2), at least one third use with low priority, conventionally indicated by (EF); said first use (PR1) is directly connected to said source (P) by a relative first pipe (2) and said second use (PR2) and third use (EF) are connectable to said source (P) with respective second and third pipes (3, 4) by interposing valve means (5) equipped with an internal distributor member (6) to control said second and third pipes (2, 3) and movable according to at least three connection configurations, in a first configuration (100) said second use (PR2) and third use (EF) being shut, in a second configuration (101) said second use (PR2) being open and said third use (EF) being shut, in a third configuration (102) said second use (PR2) being open and said (EF) being open.

WO 2004/046561 A1

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations* AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK,

EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation* US
- *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

- *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## FLUID CIRCUIT FOR FEEDING PRIMARY AND AUXILIARY USERS WITH PRESET PRIORITIES

This invention concerns a fluid-dynamic circuit for supplying primary and auxiliary uses with preset priorities.

5 In fluid-dynamic circuits it may be necessary to set so-called "priorities" for supplying different uses with a pumping unit, i.e. setting a desired sequence for supplying of the different uses by the pump may be required.

For example, in operating machines such as agricultural  
10 tractors the circuits that supply the different uses, such as the power-assisted steering, the braking system, and a hydraulic lift are equipped with valves suitable for directing volumes of pressurised oil towards said uses according to the priority with which said uses have to be used.

15 A main priority consists of supplying the hydroguide as it enables the operating machine to be driven in the desired directions.

A secondary, albeit important, priority is considered to be supplying the braking system of the machine and any trailer  
20 attached thereto.

Lastly, a final priority is considered to be supplying the different auxiliary services, i.e. the equipment with which the machine is equipped and which enable it to perform the different jobs for which it has been built.

25 Currently, to obtain the actuation of said supply priorities, circuits are used that tend to consist of a single pump that is connected to a plurality of valves that are in turn serially connected together and interposed between the pump and the different uses to provide them with supplying  
30 according to the preset priorities.

Although the serial connection between said valves enables the desired supply sequences to be achieved in a functionally correct manner, it has the disadvantage of generating noticeable losses of load along the supply lines, in

particular along the line directed to the auxiliary services.

The technical task of this invention is to eliminate the disadvantages of the prior art mentioned above by devising a fluid-dynamic circuit for supplying primary and auxiliary uses with preset priorities that enables several uses to be supplied with preset priorities, thereby limiting the load losses due to the presence of multiple valve organs.

Another object of this invention is to perform the previous tasks with a fluid-dynamic circuit that has a simple structure and operates effectively, as well as having a relatively moderate cost, the number of valve organs to be used being limited.

This task and these objects are all achieved by this fluid-dynamic circuit for supplying primary and auxiliary uses with preset priorities, comprising a source of pressurised fluid, conventionally indicated by P, at least one first use with primary priority, conventionally indicated by PR1, at least one second use with secondary priority, conventionally indicated by PR2, at least one third use with low priority, conventionally indicated by EF, characterised in that said PR1 is directly connected to said source P by a relative first pipe, that said PR2 and EF are connectable to said source P with respective second and third pipes by interposing valve means equipped with an internal distributor to control said second and third pipes and movable according to at least three connection configurations, in a first configuration said PR2 and EF being shut, in a second configuration said PR2 being open and said EF being shut, in a third configuration said PR2 being open and said EF being open.

Further characteristics and advantages of the inventions will be made more obvious in the detailed disclosure of a preferred but not exclusive embodiment of a fluid-dynamic circuit for supplying primary and auxiliary uses with preset priorities that is illustrated by way of non-limiting example in the

attached drawings wherein:

Figures 1, 2, 3 show a diagram of a simplified embodiment of a fluid-dynamic circuit for supplying primary and auxiliary services of operating machines with preset priorities, in the three possible connection configurations;

Figures 4 and 5 show a diagram of the fluid-dynamic circuit according to the invention in a second possible embodiment with the use of valve means with five operational configurations and respectively with a source of the fixed-flow and variable type;

Figures 6 and 7 show yet another diagram of the fluid-dynamic circuit according to the invention in a third possible embodiment, equipped with protective valve means interposed between the source and the first use PR1, respectively with said source of the fixed-flow and variable type.

With particular reference to said Figures, 1 indicates overall a fluid-dynamic circuit for supplying primary and auxiliary uses with preset priorities.

The circuit 1 comprises a pressurised fluid source, indicated overall by P, a first use with primary priority, indicated by PR1, a second use with secondary priority, indicated by PR2 and a third use with low priority, indicated by EF.

Said uses are usually connected to the source P by means of the relative pipes: a first pipe 2 connects said use PR1 with primary priority directly to said source P, whilst a second pipe connects the source P to the use PR2 with secondary priority and a third pipe 4 connects the source P to the use EF with low priority.

Said first pipe 2, second pipe 3 and third pipe 4 flow into valve means 5 equipped with an internal distributor member 6 for the control of the connection between said first pipe 2 and second pipe 3 and third pipe 4.

The distributor member 6 is movable according to at least three connection configurations: in a first configuration

(figure 1), indicated by 100 in the drawings, the uses with secondary priority PR2 and the uses with low priority EF are both shut; in a second configuration (figure 2), indicated by 101, the uses secondary priority PR2 and the uses with low priority EF are open and shut respectively; in a third configuration (figure 3), indicated by 102, the uses with secondary priority PR2 and the uses with low priority EF are both open.

In the circuit 1 according to the invention, between said source P and the valve means 5, a first signal line 20 is provided for detecting the pressure of the fluid and the transmission of the relative signal; also between the uses PR1 and PR2 a third and second signal line for measuring the pressure of said fluid are respectively provided, indicated respectively by 40 and 30; the second and third pressure signal lines 30 and 40 are better known by the technical term "load sensing".

The first signal line 20 emerges on an end of the distributor means 6.

On the opposite end of the distributor member 6 a further signal line 20' emerges that moves away from a selector organ 15 to which the second signal line 30 and the third signal line are connected.

The distributor member 6 is mobile between the three possible configurations 100, 101 and 102 through the action of the pressure differences between said first signal line 20 and the further signal line 20'.

The selector organ 14 is of the conventional type and is used to transfer onto the further signal line 20' the greatest of the pressure signals detected on the second signal line 30 or on the third signal line 40.

The distributor member 6 is also subjected to a continuous contrast action of elastic means 7 that exerts preset force on the distributor member 6.

The force of the elastic means 7, the pressure of the fluid in the further signal line 20' at one end and the pressure of the fluid in the first signal line 20 at the opposite end therefore act on the distributor member 6.

5 If there is no pressure in the first signal line 20, and in the further signal line 20', the elastic means 7 shifts the distributor member 6 towards the first configuration 100.

In another embodiment of the circuit 1 shown in Figures 4 to 7, the distributor member 6 provides at least a first fourth  
10 configuration 103 interposed between the first configuration 100 and the second configuration 101 and a fifth configuration 104 interposed between the second configuration 101 and a fifth configuration 104 interposed between the third configuration 102.

15 In the fourth configuration 103, the second use PR2 is partially shut in the useful section of the passage of the pressurised fluid and the third use EF is shut.

In the fifth configuration 104, the second use PR2 is open and the third use EF is partially shut.

20 Normally, the source P comprises a pumping unit that may be of the fixed-flow type, indicated by 8 or of the variable-flow type and indicated by 9.

In the fluid-dynamic circuit 1 according to the invention, between the source P and the first use PR1 at least one  
25 protective valve means 10 of the use is interposable, said valve means 10 being equipped with an organ 11 with a presettable intervention threshold.

The valve means 10 is also piloted by a shutter member 12 between at least two intervention positions: in a first  
30 position 200 the valve means 10 is open and the pressurised fluid flows freely towards the first use PR1 whereas in a second position 201 it is completely shut, thereby interrupting the flow of fluid directed towards said first use PR1.

The organ 11 comprises at least one contrasting spring 13 that continuously acts in the opposite direction to the shift of the shutter member 12 to return it, or to keep it in the normal open configuration 200 of the valve means 10.

5 In a further embodiment of the fluid-dynamic circuit 1, between the source P and the first use PR1, on the pipe branch that connects them, valve means 14 is interposable that is suitable for limiting the maximum flow of the fluid directed towards said first use PR1.

10 The operation of the fluid-dynamic circuit 1 for supplying primary uses PR1, secondary uses PR2 and auxiliary uses EF with preset priorities according to the invention is as follows: when the first use PR1 requires the entire maximum flow of pressurised fluid, the distributor member 6 of the  
15 valve means 5, subjected at one end to the diminishing pressure detected by the first signal line 20 and at the opposite end subjected to the pressure detected by the further signal line 20' and to the action of the elastic means 7, it is progressively arranged in the configuration 100 and  
20 sequentially closes the connections first with the third use EF and subsequently also with the second use PR2, as indicated in Figure 1.

When on the other hand the flow of the source P is sufficient to supply all the uses pressures of the first signal line 20  
25 and of the further signal line 20' pilot the distributor member 6 in such a way that the latter is placed in the connection configuration 102 illustrated in Figure 3, thereby overcoming the contrasting action of the elastic means 7: the pressurised fluid in said configuration suffers rather limited  
30 load losses as it has to go through only one valve means 5 to reach the different uses, in particular the third use EF.

Figure 2 illustrates an intermediate connection configuration 101, in other words with the distributor member 6 positioned in the configuration 101; in this configuration 101 the supply



to the third use EF is shut whilst the supply to the first use PR1 and to the second use PR2 are open; this configuration occurs when the source P has sufficient flow to supply only the first use PR1 and the second use PR2.

5 For example, if the fluid-dynamic circuit 1 is applied to an operating machine of the type used on construction sites or to a farm tractor the first use PR1 supplies the hydroguide, the second use PR2 supplies the braking system, the third use EF supplies the machine's services, in other words the work tools  
10 with which the said machine is equipped.

The operation of the circuit 1 according to the invention is as disclosed above also in the embodiments illustrated in figures 4, 5, 6, 7: the pressures of the second sensor line 30 and of the third sensor line 40 both flow into the selector  
15 organ 15 wherefrom the pressure of the further sensor line 20' flows out, which coincides with the greatest pressure of said pressures of the second sensor line 30 and the third sensor line 40.

The pressure of the further sensor line 20' acts on an end of the distributor member 6 and, at the opposite end, there is  
20 the action of the first signal line 20.

The distributor member 6, when the operating machine is moving, is in the connection configuration indicated by 102, if the machine is equipped with a source P comprising a pump 9  
25 with variable flow, or in the configuration 104 if the pump 8 is of the fixed-flow type.

When the first use PR1 requires the entire fluid flow, the signal line 20 detects a pressure drop signal; the elastic means 7 acts on the distributor member 6 of the valve means 5  
30 and first pushes it and then maintains it in the connection configuration 100 wherein the second use PR2 and the third use EF are both shut.

When the driver acts on the brake, in the pipe 3 of the second use PR2 fluid is recalled: if the flow of the source P is

insufficient, the pressure detected by the first signal line 20 is overtaken by the signal of the further signal line 20', which in this case coincides with the pressure of the second signal line 30, added to the force of the elastic means: this progressively shifts the distributor means 6 towards the configuration 101 passing through the fifth configuration 104. If the source P comprises a pump 9 of the variable-flow type (Figures 5 and 7), a fourth pressure-sensor line 50 is provided between the third use EF and the pump 9, also with the interposing of a second selector organ, indicated by 16, to which are added, in addition to the pressure signal detected by said line 50, also the pressure signal detected by said line 50, also the greatest of the signals detected by the sensor organ 15: the second sensor organ 16 selects and sends to the pump 9 the greatest of said signals to pilot the overall flow of said pump.

Finally, the valve organ 10 can be positioned on the pipe 2, between the source P and the first use PR1 for protection, if requested by the latter in order that it does not reach an excessive non-required flow or pressure that might damage it.

In practice it has been established that the disclosed invention achieves the proposed objects, in particular that it can supply by means of a sole valve means at least three uses with preset priorities and with minimal load loss.

The invention that has been thus conceived may be subject to modifications and variations, all of which fall within the scope of protection as defined by the content of the following claims. Furthermore, all the details can be replaced by other technically equivalent details and any materials and shapes and dimensions may be used according to requirements.

## CLAIMS

- 1) Fluid-dynamic circuit (1) for supplying primary and auxiliary uses with preset priorities comprising a source of pressurised fluid; conventionally indicated by (P), at least  
5 one first use with primary priority, conventionally indicated by (PR1), at least one second use with secondary priority, conventionally indicated by (PR2), at least one third use with low priority, conventionally indicated by a (EF), characterised in that said first use (PR1) is directly  
10 connected to said source (P) by a relative first pipe (2), that said second use (PR2) and third use (EF) are connectable to said source (P) by said second (3) and third pipe (4) by interposing valve means (5) equipped with a distributor member (6) controlling said second (3) and third pipe (4) and movable  
15 according to at least three connection configurations, in a first configuration (100) said second use (PR2) and third use (EF) being shut, in a second configuration (101) said second use (PR2) being open and third use (EF) shut, in a third configuration (102) said second use (PR2) being open and third  
20 use (EF) open.
- 2) Fluid-dynamic circuit (1) according to claim 1 characterised in that between said source (P) and said valve means (5) at least one first signal line (20) detecting a first pressure signal of said fluid is provided, that between  
25 said second use (PR2) and said valve means (5) a second signal line (30) detecting a second pressure signal of said fluid is provided, that between said first use (PR1) and said valve means (5) a third signal line (30) detecting a third pressure signal of said fluid is provided.
- 30 3) Fluid-dynamic circuit (1) according to claims 1 and 2 characterised in that said first pressure signal line (20) is connected to said distributor member (6) of said valve means (5) in an antagonistic manner to said second pressure signal line (30) and said third pressure signal line (40), said

distributor member (6) being actuated mobile between at least three of said connection configurations (100, 101, 102) by signal differences detectable by said first pressure signal line (20) and by said second (30) and third pressure signal lines (40).

4) Fluid-dynamic circuit (1) according to claim 3 characterised in that said first pressure signal line (20) activates the shift of said distributor member (6) towards opening connection configurations of said second use (PR2) and third use (EF), said second (30) and said third pressure signal lines (40) activating the shift of said distributor member (6) towards closing connection configurations of said second use (PR2) and third use (EF).

5) Fluid-dynamic circuit (1) according to claims 2, 3, and 4 characterised in that at least between said second pressure signal line (30) and said third (40) pressure signal line an organ (15) is interposed selecting said second and third signal, the greatest thereof on the output being selected by a further signal line (20') acting on said distributor member (6) antagonistically in relation to said first signal of said first signal line (20).

6) Fluid-dynamic circuit (1) according to claims 1, 2 and 3 characterised in that said distributor member (6) is normally contrasted in said second (101) and third connecting configuration (102) by at least one elastic means (7) with a presettable reactive force, to recall said distributor member (6) to said first configuration (100) in the absence of said signals of said first sensor line (20) and of a further sensor line (20').

7) Fluid-dynamic circuit (1) according to claim 1 characterised in that said distributor member (6) is positionable in at least a fourth configuration (103) and a fifth configuration (104), said fourth configuration (103) being interposed between said first configuration (100) and

said second configuration (101), said fifth configuration (104) being interposed between said second configuration (101) and said third configuration (102), in said fourth configuration (103) said second use (PR2) being partially shut and said third use (EF) being shut, in said fifth configuration (104) said second use (PR2) being open and said third use (DF) being partially shut.

8) Fluid-dynamic circuit (1) according to claim 1 characterised in that said source (P) comprises a pumping unit(8) of the fixed-flow type.

9) Fluid-dynamic circuit (1) according to claim 1 characterised in that said source (P) comprises a pumping unit(9) of the variable-flow type.

10) Fluid-dynamic circuit (1) according to claim 1 characterised in that between said source (P) and said first use (PR1) at least one protective valve means is interposable (10) that is equipped with an organ (11) with a presettable intervention threshold.

11) Fluid-dynamic circuit (1) according to claim 10 characterised in that said valve means (10) is piloted by a shutter member (12) between at least two intervention positions (200, 201), said valve means (20) being open in a first position (200), said valve means (20) being shut in a second position (201).

12) Fluid-dynamic circuit (1) according to claim 11 characterised in that said organ (11) with a presettable intervention threshold comprises at least one pre-chargeable contrast spring (13) constantly acting on said shutter member (12) to recall the latter to said open configuration (200) of said valve means (10).

13) Fluid-dynamic circuit (1) according to claim 1 characterised in that between said source (P) and said first use (PR1) valve means (14) limiting the flow of fluid towards said first use (PR1) is interposable.

**Fig. 3**

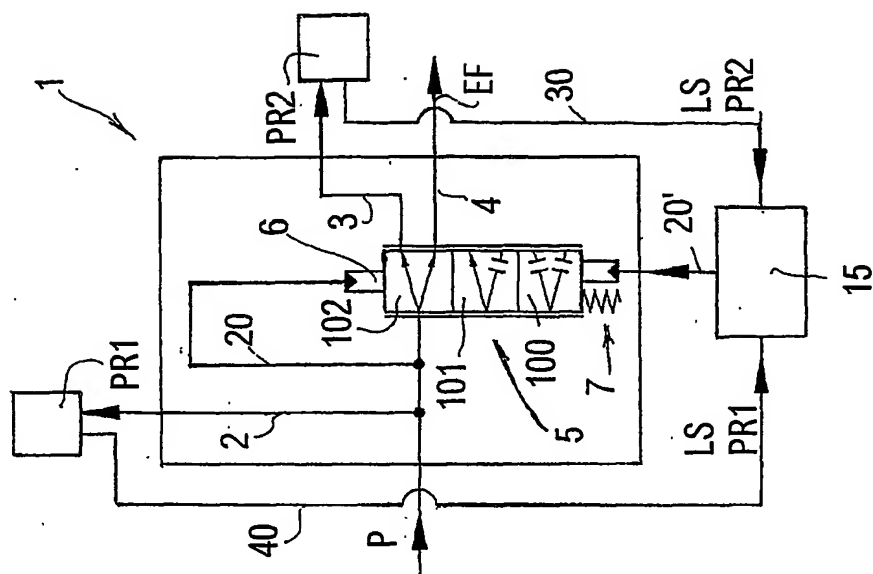


Fig. 2

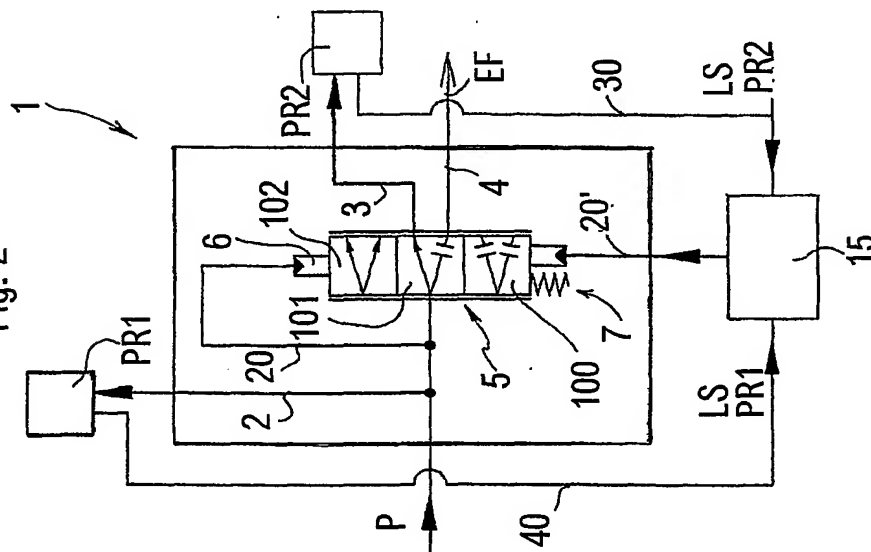


Fig. 1

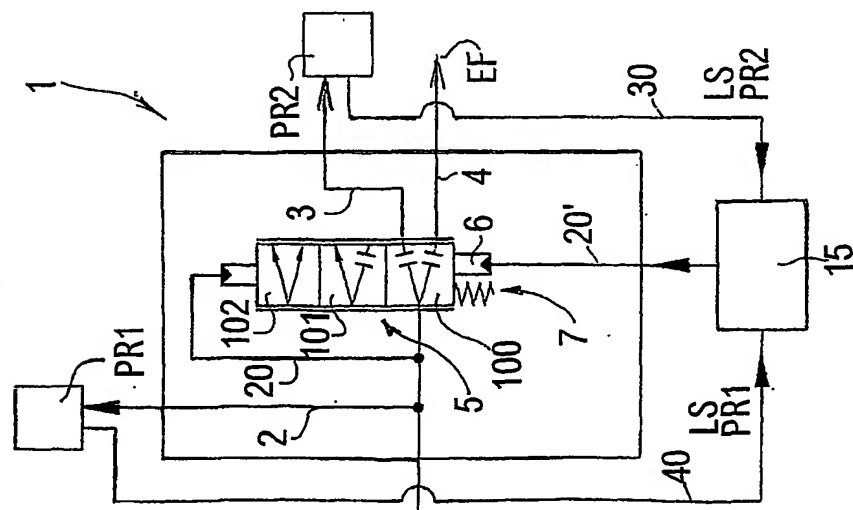


Fig.4

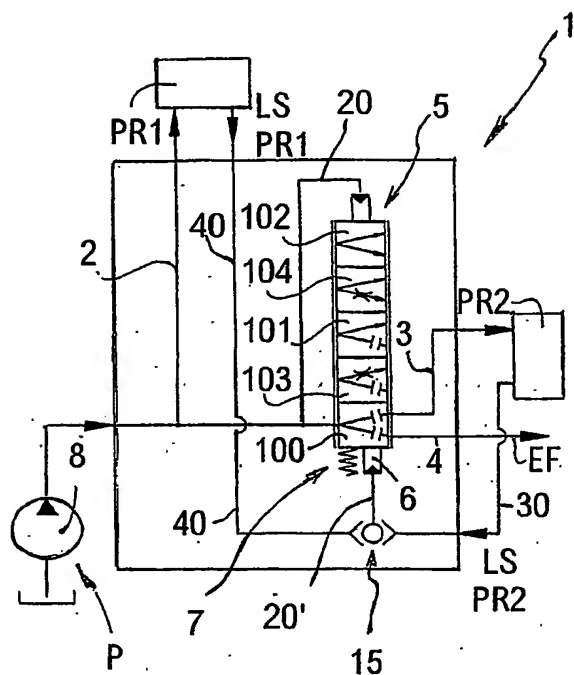


Fig. 5

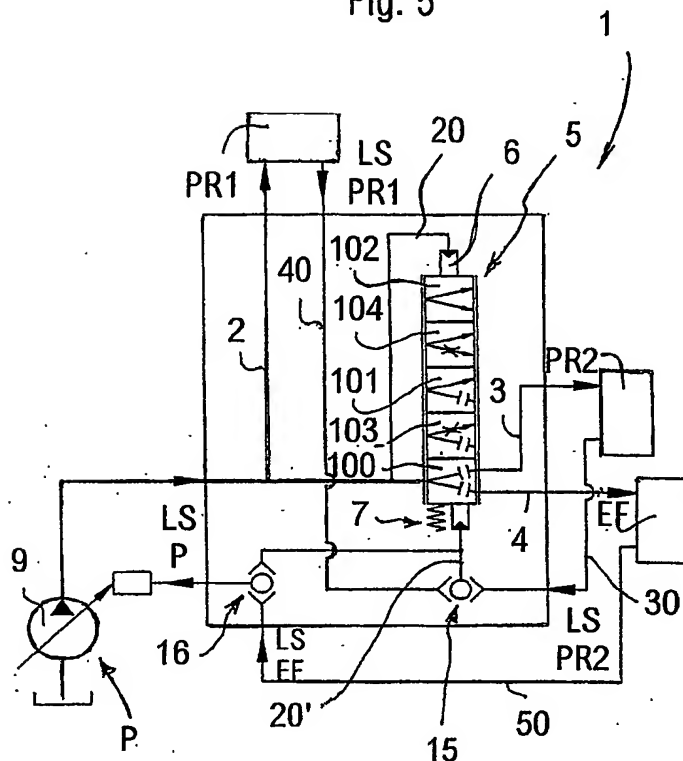


Fig. 6


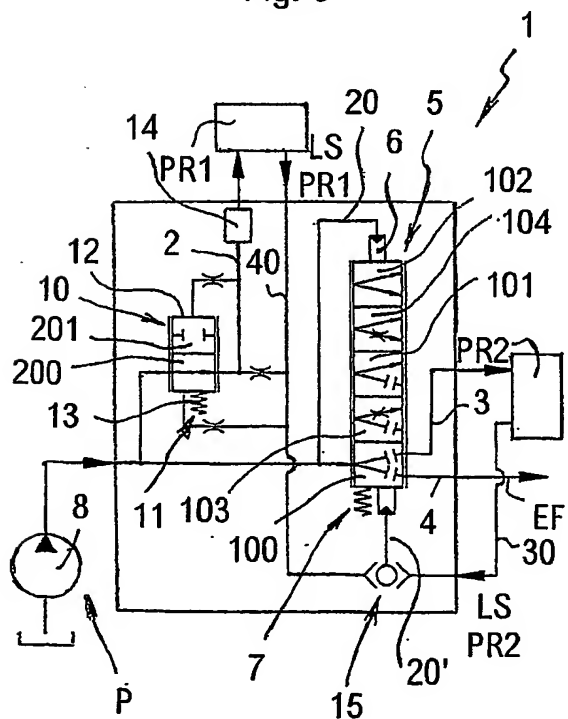


Fig. 7

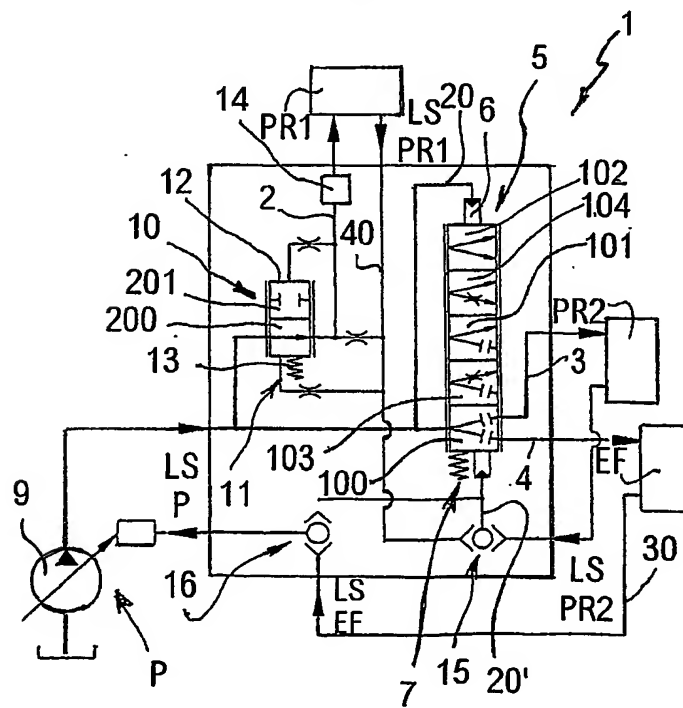

## INTERNATIONAL SEARCH REPORT

International Application No

IB 03/05191

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F15B13/02 F15B11/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F15B B62D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 245 834 A (BOSCH GMBH ROBERT)	1,6-13
A	2 October 2002 (2002-10-02) abstract paragraph '0011!; figure 1 ----	2-5
X	US 2002/166320 A1 (BUSCHER JEFFREY J. ET AL) 14 November 2002 (2002-11-14)	1,6-13
A	paragraphs '0030!-'0032!; '0042!; figure 1 ----	2-4
A	FR 2 757 222 A (MANNESMANN REXROTH SA) 19 June 1998 (1998-06-19) page 10, line 6-30; figure 1 -----	10-13

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

25 February 2004

Date of mailing of the international search report

02/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Rechenmacher, M



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/05191

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 1245834	A	02-10-2002	DE	10115650 A1		02-10-2002
			EP	1245834 A1		02-10-2002
US 2002166320	A1	14-11-2002	EP	1387932 A2		11-02-2004
			WO	02090736 A2		14-11-2002
FR 2757222	A	19-06-1998	FR	2757222 A1		19-06-1998